

Operational Model Based Regional Estimation using Remote Sensing Data

Muhammad Hamza¹, Nasru Minallah², Waleed Khan²

¹ National Center for Big Data and Cloud Computing (NCBC), Department of Computer Science & Information Technology, University of Engineering and Technology, Peshawar, Pakistan

² NCBC, Department of Computer System Engineering, University of Engineering and Technology, Peshawar, Pakistan

* **Correspondence:** Waleed Khan, ID: khanwaleed@uetpeshawar.edu.pk

Citation | Hamza. M, Minallah. N, Khan. W, “Operational Model Based Regional Estimation using Remote Sensing Data”, IJIST, Vol. 6 Issue. 1 pp 185-200, March 2024

DOI | <https://doi.org/10.33411/ijist/202461185200>

Received | Jan 16, 2024, **Revised |** Feb 25, 2024, **Accepted |** Feb 28, 2024, **Published |** March 02, 2024.

Water serves as the vital hub for sustaining life. There is indisputable evidence that the progress of agriculture, which relies directly on water resources, bears direct responsibility for the current global human population. While undeniably invaluable, our planet's freshwater reserves face a mounting challenge in keeping up with the ever-expanding global population. This is primarily due to inefficiencies prevalent in various residential water applications, with irrigation practices in developing nations standing out as a significant contributor to this issue. As our communities continue to grow, it becomes increasingly imperative to address these inefficiencies to ensure sustainable access to this precious resource for generations to come. This dilemma is particularly concerning given the projection of continued population expansion. Concerning irrigation, it is widely acknowledged that more than 60% of water allocated for agricultural purposes is presently being administered in excess, leading to substantial annual wastage. To obtain a precise estimation of the water needed for crop production, it is imperative to devise, develop, and implement a practical and effective method. Employing manual techniques, such as utilizing a lysimeter, for gauging a structure's water requirements is both subjective and financially demanding. This research has been designed to provide a comprehensive measurement of daily ET over a wide geographical area, offering detailed field-specific information. This research work is carried out by utilizing the European Space Agency satellites i.e., Sentinel 2 and 3, and ECMWF meteorological data. The Sentinel-2 data was processed to calculate the biophysical variables, structural parameters, fraction of green vegetation, and aerodynamic roughness. Sentinel 3 data was used to get the land surface temperature. The whole data is then processed to estimate the ET of the chosen area which is discussed in the materials and methods section. Actual water requirement and the water provided to the tobacco crops were compared. The results of the study reveal that estimated ET values were inline with the average surveyed tobacco field values that represents the consistency. However, a significant discrepancy arises due to irregular irrigation practices, indicating a lack of consideration for ET values among farmers. This oversight, coupled with unadjusted irrigation timing and methods, contributes to variance between computed and required ET values, attributed to factors such as human error, insufficient rainfall, and improper practices.

Evapo-transpiration (ET)
Computed Evapo-transpiration (ETc)
Actual Evapo-transpiration (ETa)
Flue Cured Virginia (FCV)
European Space Agency (ESA)
Sustainable Development Goals (SDGs)
Gross Domestic Product (GDP)
Energy Balance
Priestley–Taylor model (TSEB-PT)
multispectral instrument (MSI)
top of atmosphere (TOA)
leaf area index (LAI)
Normalized Difference Vegetation Index (NDVI)
Land-Surface Temperature (LST)
Surface Energy Balance Algorithm for Land (SEBAL) or the Simplified Surface Energy Balance (SSEB)
European Centre for Medium-Range Weather Forecasts (ECMWF)
Centre for Medium-Range Weather Forecasts (ECMWF)

Keywords: ET, Sentinel-2, Sentinel-3, ECMWF ERA-5, European Space Agency.



Introduction:

A major issue associated with irrigation is its excessive water consumption. Each year, more than 60% of the water allocated for agriculture is lost due to inefficient practices. Addressing this challenge requires the development of an effective method to accurately determine the water requirement for crop cultivation. Conventional approaches, such as using lysimeters, are both subjective and economically demanding, posing difficulties for widespread adoption. Advances in remote sensing technologies offer a potential solution. Remote sensing of ET proves crucial in tackling various water management dilemmas. By recording daily ET across extensive areas and furnishing field-level data, remote sensing systems have the potential to optimize water usage. Grants provided by both provincial and federal governments to communities played a pivotal role in expediting this development. However, these substantial disbursements also incentivized local governments to implement infrastructure systems with capacities that surpass actual requirements [1].

Irrigation practices lead to the wastage of nearly 60% of agricultural water, depleting crucial water reserves and exacerbating water scarcity. The excessive exploitation of water resources results in environmental degradation, the desiccation of water bodies, and the loss of biodiversity disrupting the fragile ecological equilibrium. This pressing issue is placing immense strain on communities and necessitates urgent and comprehensive action to secure reliable access to this vital resource [2]. Thus, implementing effective management strategies is imperative to safeguard the nation's water reservoirs and ensure their sustainable utilization for the benefit of current and future generations [3].

Satellite Remote Sensing involves the collection and monitoring of data from a remote location through the measurement of reflected radiation, typically conducted using aircraft or satellites [4]. Utilizing satellites for remote sensing confers several advantages over traditional ground-based data collection methods. Moreover, the sensors employed in satellite remote sensing undergo calibration to ensure the accuracy of measurements, resulting in data that is both reliable and precise.

Pakistan's agriculture industry, where farmers primarily follow traditional farming practices and use primitive tools and knowledge, forms the backbone of the nation's economy [5]. The study of the FCV plant, which represents a crucial frontier in agricultural growth, makes this paradigm change particularly clear. Within this context, it is imperative for Pakistan, as a nation deeply intertwined with its agrarian roots, to embrace progressive methodologies, leveraging modern technology and research to fortify its agricultural landscape. By doing so, not only can we bolster food security but also alleviate the looming specter of water scarcity, ensuring a sustainable and prosperous future for our agricultural endeavors.

FCV is a pivotal tobacco crop cultivated in Pakistan. The nation benefits from favorable agro-climatic conditions, characterized by warm temperatures and well-drained soils, providing an ideal environment for its growth. Predominantly, FCV cultivation in Pakistan is concentrated in the provinces of Khyber Pakhtunkhwa and Punjab. The crop undergoes meticulous agronomic practices, including precise irrigation and timely application of fertilizers, to achieve optimal yields and quality. The favorable agro-climatic conditions in the nation, which are characterized by high temperatures and well-drained soils, are ideal for this tobacco crop's robust growth and development. The main centers of FCV cultivation in Pakistan are Khyber Pakhtunkhwa and Punjab, which greatly profit from the favorable environmental conditions. Several precise agronomic procedures are used during the FCV cultivation process. To achieve not only the highest yields but also exceptional quality in the harvested food, these practices include the use of precise irrigation techniques and the timely application of a balanced array of nutrients.

Objective:

- Investigate and analyse the existing irrigation practices in developing nations, with a focus on identifying inefficiencies leading to excessive water usage.
- Develop targeted interventions and strategies to address these inefficiencies by leveraging remote sensing data from sentinel 2 and 3, aiming to align agricultural water allocation with actual crop water requirements and promote sustainable water use.

Novelty:

This research revolutionizes agricultural water management by using European Space Agency satellites (sentinel 2 and 3) to implement a groundbreaking irrigation system. It provides precise daily ET measurements, challenging and optimizing irregular irrigation practices in developing nations. The innovation lies in its potential to ensure sustainable water use for a growing global population.

Related Work:

The applications of remote sensing are extensive, particularly in the fields of agriculture [6][7] and climate studies [8]. Primarily, satellites possess the capacity to cover vast expanses swiftly and effectively, providing an aerial view of the Earth's surface. They can also provide information from places that are difficult to reach or are completely unreachable using ground-based approaches, such as the polar regions and remote areas of the ocean. Within the ESA, the Sentinel series stands as a pinnacle of excellence in this regard. The primary mission of these satellites is to maintain continuous surveillance of Earth and collect data on the planet at regular intervals. This data, gathered by the Sentinel-series satellites and ECMWF, proves invaluable for research purposes. ET is the mechanism through which water vapor migrates from both the soil and the surfaces of plants into the surrounding atmosphere, as depicted in Figure 1. Obtaining an accurate estimation of ET is paramount, especially in light of the continuous global population growth. This precision is crucial for conserving larger quantities of water. Reliable ET estimates find applications in various contexts, including, but not limited to, water resource management, monitoring droughts and food shortages, and optimizing agricultural practices for more efficient land and water utilization. A number of SDGs set forth by the United Nations, including ending world hunger, ensuring access to clean water and sanitation, and protecting life on land, among others, can be achieved with the help of these applications [9]. The economic impact of tobacco is noteworthy, contributing to approximately 0.09% of Pakistan's GDP. It occupies a notable 0.23% of all irrigated land in the country. These figures underscore the substantial footprint of tobacco cultivation within Pakistan's agricultural landscape, emphasizing the need for a balanced and sustainable approach to managing this vital sector. As the nation navigates its agricultural and economic pathways, it is imperative to consider the multifaceted dimensions of tobacco production and its wider implications for both the farming community and the national economy as a whole [10][11]. Various methods are employed to estimate ET, but they often rely on physical devices like lysimeters, atmometers, or evaporimeters, which can be prohibitively costly and time-intensive [12]. The advent of remote sensing satellites has revolutionized the ability to observe and document Earth's resources utilizing a range of multispectral and thermal sensors. Notable among these satellites is Landsat, launched in 1972, followed by the Sentinel series, which is equipped with multispectral remote sensing capabilities for monitoring and acquiring geographic information [13][14]. Within the Sentinel series, Sentinel-2 is a polar-orbiting, high-resolution imaging mission designed for multispectral capture of vegetation, soil, and water cover information [15]. This mission includes the sub-satellites Sentinel 2A, 2B, 3A, 61, and 3B, which were launched in 2015, 2017, 2016, and 2018 respectively. ET, a combined term comprising both evaporation and transpiration, plays a vital role in the Earth's hydrological cycle as introduced by [5]. The rate of ET from the Earth's surface is contingent on five crucial factors: energy availability, humidity gradient, wind speed, water availability, and the specific type of crop. Numerous studies, documented in references

[16][17][18][19], have been undertaken in recent years to estimate and measure ET, utilizing a combination of conventional methods and advanced remote sensing techniques. In this specific research, ET is computed using data gleaned from the Sentinel satellites and ECMWF. This information is processed employing ESA's Sentinel-2 and Sentinel-3 satellites, in tandem with the Tow Source TSEB-PT. For validating the calculated values, information sourced from FAO-Crop Wat was utilized. Graphical representations were generated to facilitate a comprehensive conclusion.

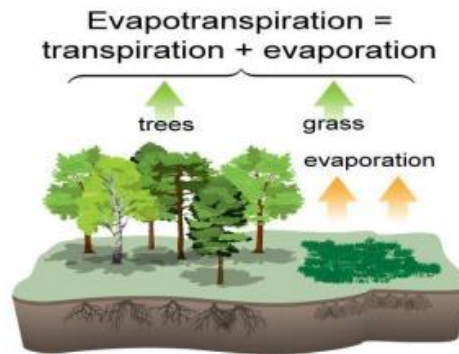


Figure 1. Process of ET (https://www.researchgate.net/figure/The-evapotranspiration-process-is-the-loss-of-water-from-vegetation-based-on-the_fig1_358674415)

Material and Methods:

Investigation Site:

In the pursuit of gathering accurate ground truth data for this research endeavor, the Yar Hussain region emerged as the designated area of study located in Swabi district of Khyber Pakhtunkhwa. This offers a diverse landscape that encompasses sprawling agricultural plots, urban structures, and winding waterways. Yar Hussain, strategically positioned about 12 KM from the district's administrative heart in Swabi, is further situated approximately 82 KM from the provincial capital of Peshawar.

Beyond its geographical attributes, Yar Hussain assumes a pivotal role as a bustling commercial hub, catering to the business needs of nearby towns like Yaqubi, Sard Chena, Ghazikot, Naiknam, Debian, etc. This expansive reach underscores the town's significance as a critical economic centre for the wider region. Moreover, Yar Hussain boasts noteworthy importance in the context of the tobacco industry, solidifying its status as a major player in this sector. For a visual representation, Tehsil Yar Hussain can be observed in Figure 2 below, offering a comprehensive overview of its geographical layout and the intricate interplay of its various features. This chosen area serves as an ideal microcosm for the research, encapsulating a rich tapestry of urban and agricultural elements essential for a thorough examination of the subject matter at hand.

Data Collection:

The data for our experiments was sourced from various outlets, including Sentinel-2, Sentinel-3, and ECMWF weather data. We retrieved the most up-to-date Sentinel-2 and Sentinel-3 data from ESA. The timeline for the acquisition of satellite imagery and ECMWF data is illustrated in Table 1 along with different stages of the phenological cycle of FCV is also provided in Table 1.

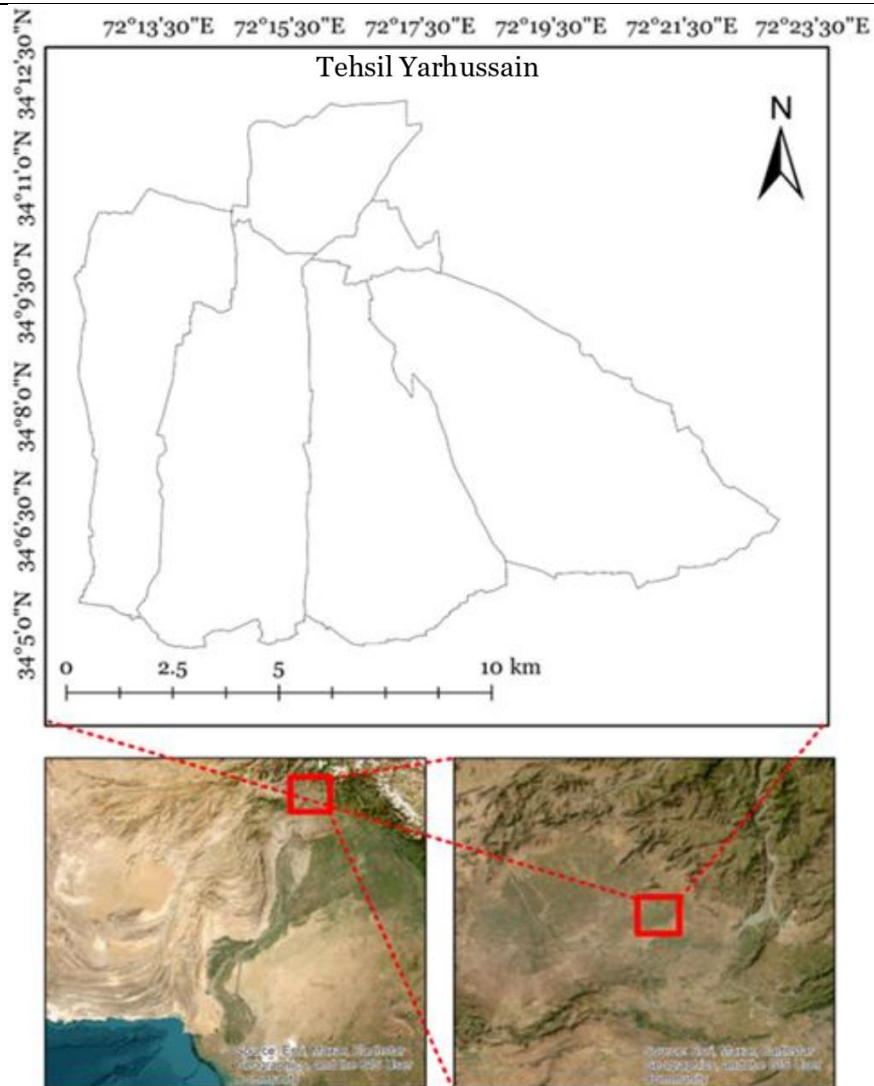


Figure 2. Yar Hussain- Locality Map

Table 1: Data acquisition date of satellite imagery

Stages	DOY
Initial Season	16 th March
	21 st March
	31 st March
Development Season	10 th April
	15 th April
	25 th April
	30 th April
	5 th May
Mid-Season	10 th May
	13 th May
	18 th May
	28 th May
	4 th June
Late Season	12 th June
	24 th June
	29 th June

In Figure 3 Figure 2 below, we present the extensive SENET execution designed for the precise estimation of ET. The components showcased in the figure intricately outline the step-by-step workflow employed for ET estimation. Each of these steps is meticulously expounded upon in the respective sections dedicated to Sentinel-2, Sentinel-3, and ECMWF data sources.

This workflow unfolds systematically, progressing through each stage in a carefully orchestrated manner, as detailed in the forthcoming subsections. This deliberate approach ensures a comprehensive and thorough assessment of ET, drawing on the combined strengths of the Sentinel satellites and ECMWF data, thus facilitating a robust and accurate estimation process.

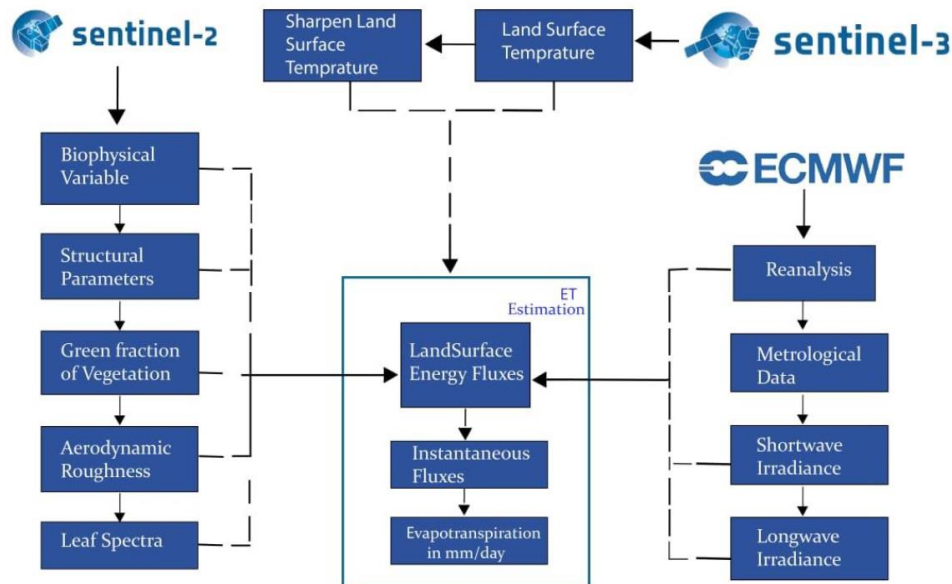


Figure 3: ET Calculation Cycle

Sentinel-2:

The ESA Sentinel-2 satellite represents a significant asset for remote sensing applications. It provides high-resolution multispectral level-2A imagery, acquired through the agency's scientific data hub webpage (ESA). Despite being equipped with a single MSI, this instrument encompasses an impressive array of 13 distinct spectral channels. What sets Sentinel-2 apart is its deployment as a constellation of satellites, all outfitted with identical sensors. This collective effort results in an impressive 5-day revisit time, a crucial feature for applications like land-use mapping, where consistent and up-to-date imagery is paramount.

The Sen ET project aimed to optimize the estimation of ET at a fine geographic scale (tens of meters) by leveraging data collected from the Sentinel 2 and Sentinel 3 satellites in tandem [20]. SENET processes the data acquired by these satellites to calculate the ET of specific regions. Sentinel-2 data is collected for analysis once every five days [21], indicating the real-time data for the Sentinel-2 satellite is not presently accessible. Nonetheless, the available data is sufficiently valuable for a range of applications. On the other hand, data from Sentinel 3 is made available daily, but compatibility issues may occasionally limit its utility.

To estimate evapotranspiration using remote sensing, we begin by acquiring satellite imagery with bands in the visible, near-infrared, and thermal infrared regions. We preprocessed the imagery by applying atmospheric correction algorithms to account for atmospheric effects. We calculated reflectance which can be seen in Figure 4: Sentinel 2 Reflectance, for each band using sensor-specific parameters and correct for bidirectional reflectance. Further adjusted for terrain effects to obtain surface reflectance. Then combine bands to create vegetation indices such as NDVI or EVI, which are indicative of vegetation health. Finally, these reflectance values and vegetation indices in evapotranspiration models, consider factors like land cover and

meteorological data. The formula to calculate ToA reflectance for remote sensing bands is given by:

$$\text{Reflectance} = \frac{\text{DN} \times \text{Gain}}{\cos(\text{Solar Zenith Angle})}$$

Where:

- Reflectance is the calculated reflectance.
- DN is the Digital Number from the satellite sensor.
- Gain is the radiometric calibration factor for each band.
- Cos (Solar Zenith Angle) is the cosine of the solar zenith angle, which is the angle between the sun and the zenith.

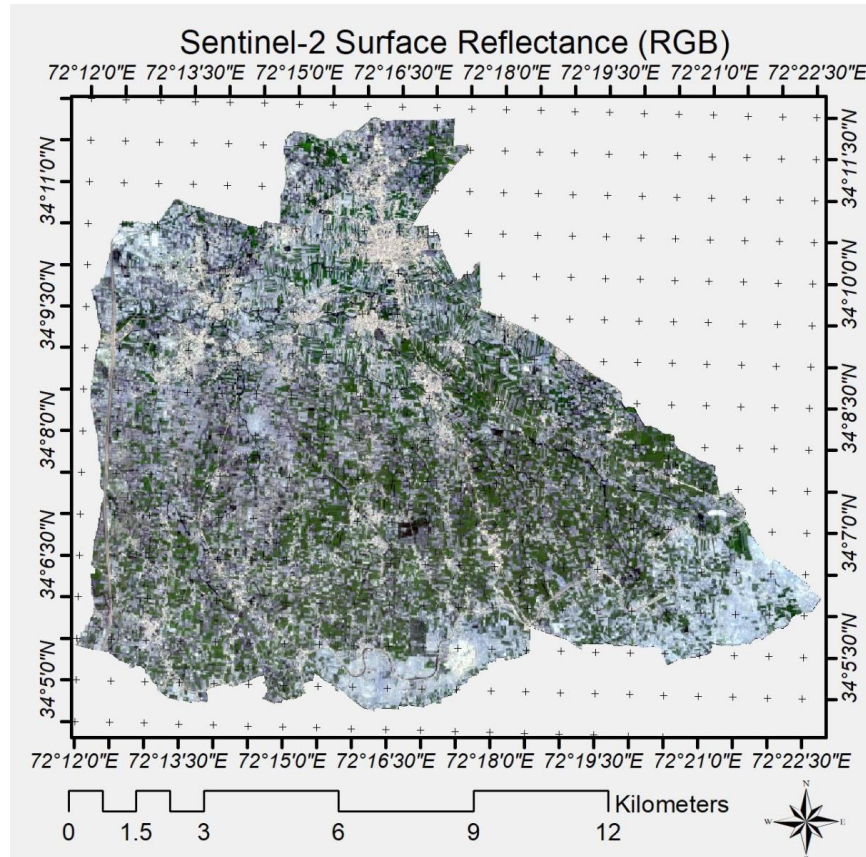


Figure 4: Sentinel 2 Reflectance

From the preprocessed Sentinel 2 data, four key output parameters are computed: Reflectance, Biophysical data, Sun Zenith Angle and Mask data. These components undergo preprocessing, specifically the Mask data, Sun Zenith Angle, Reflectance, and Biophysical data. The Mask data enables the generation of elevation and landcover maps. Biophysical characteristics play a crucial role in controlling both reflectance and transmittance. Through the integration of biophysical factors along with the sun's zenith angle, it becomes feasible to compute the proportion of green vegetation in a given area. This valuable metric, known as the "green percent," is a pivotal component in characterizing the vegetative landscape. The combination of land cover maps and biophysical data further enriches our understanding of the structural attributes within a specific ecosystem.

Biophysical data derived from remote sensing is crucial for monitoring and understanding changes in Earth's surface, ecosystem health, and environmental conditions, and it serves as input for various environmental models and studies. Biophysical data in the context of remote sensing typically refers to quantitative information about the physical characteristics of Earth's surface, vegetation, and other features. Some common biophysical parameters include

land cover, vegetation indices, LAI, and fractional vegetation cover. The NDVI is a widely used vegetation index calculated from remote sensing data, and it represents the greenness and health of vegetation. The formula for NDVI is:

$$NDVI = \frac{NIR - Red}{NIR + Red}$$

Where:

- NIR is the reflectance in the near-infrared band.
- Red is the reflectance in the red band.

LAI is another important biophysical parameter that characterizes the amount of vegetation in a canopy. It is often derived from remote sensing data using vegetation indices and specific algorithms. Fractional vegetation cover is the proportion of a pixel covered by vegetation, and it can be estimated from satellite imagery using methods that take into account the spectral characteristics of different land cover types.

The solar zenith angle is an astronomical term that defines the angle between the sun and the zenith point (directly overhead point) at a specific location on Earth's surface. It is a key parameter in remote sensing, influencing the amount of solar radiation reaching the Earth's atmosphere and surface. The solar zenith angle varies throughout the day and across different latitudes and seasons. The formula to calculate the solar zenith angle (θ) is given by:

$$\cos(\theta) = \sin(\phi) \cdot \sin(\delta) + \cos(\phi) \cdot \cos(\delta) \cdot \cos(\omega)$$

Where:

- ϕ is the latitude of the location.
- δ is the solar declination angle.
- ω is the hour angle of the sun.

Understanding the solar zenith angle is crucial in remote sensing applications because it affects the angle at which sunlight interacts with the Earth's surface. In the context of calculating reflectance, as mentioned earlier, the solar zenith angle is used to correct for the varying angle of sunlight and to normalize the reflectance values. The cosine of the solar zenith angle is often used in the reflectance calculation to account for the changing angle of incidence of solar radiation. As the solar zenith angle approaches 90 degrees (sun near the horizon), the radiation has to travel through a thicker layer of the atmosphere, which can affect the quality of remote sensing data.

Sentinel-3:

In the realm of ET estimation using Sentinel-3 processing, the methodology unfolds in distinct stages to extract essential information for accurate analysis. The initial preprocessing phase within Snap generates three key outputs: LST, Observation Geometry, and the Sentinel 3 Mask. These outputs set the stage for subsequent calculations. The "Warp to Template" stage, a pivotal step in Sentinel-3 processing, aligns and harmonizes these outputs to ensure compatibility between images. This alignment is critical for integrating Land-Surface Temperature, Observation Geometry, and the Sentinel 3 Mask seamlessly, forming a cohesive foundation for further analysis. LST which is shown in Figure 5: LST is a crucial parameter utilized in estimating evapotranspiration through remote sensing applications. LST represents the temperature of the Earth's surface and is measured by thermal infrared sensors onboard satellites. In the context of evapotranspiration estimation, LST serves as a key input in energy balance models. These models, such as the SEBAL or the SSEB, leverage LST data to calculate the energy exchanges occurring at the land surface. Specifically, LST plays a pivotal role in distinguishing between sensible and latent heat fluxes. The temperature information captured by remote sensing technologies enables the quantification of the energy used for heating the atmosphere (sensible heat) and the energy consumed in the process of water evaporation and plant transpiration (latent heat). This distinction is fundamental for accurately assessing evapotranspiration rates, providing valuable insights into water consumption patterns across

various landscapes, and supporting informed decision-making in agriculture, water resource management, and environmental monitoring.

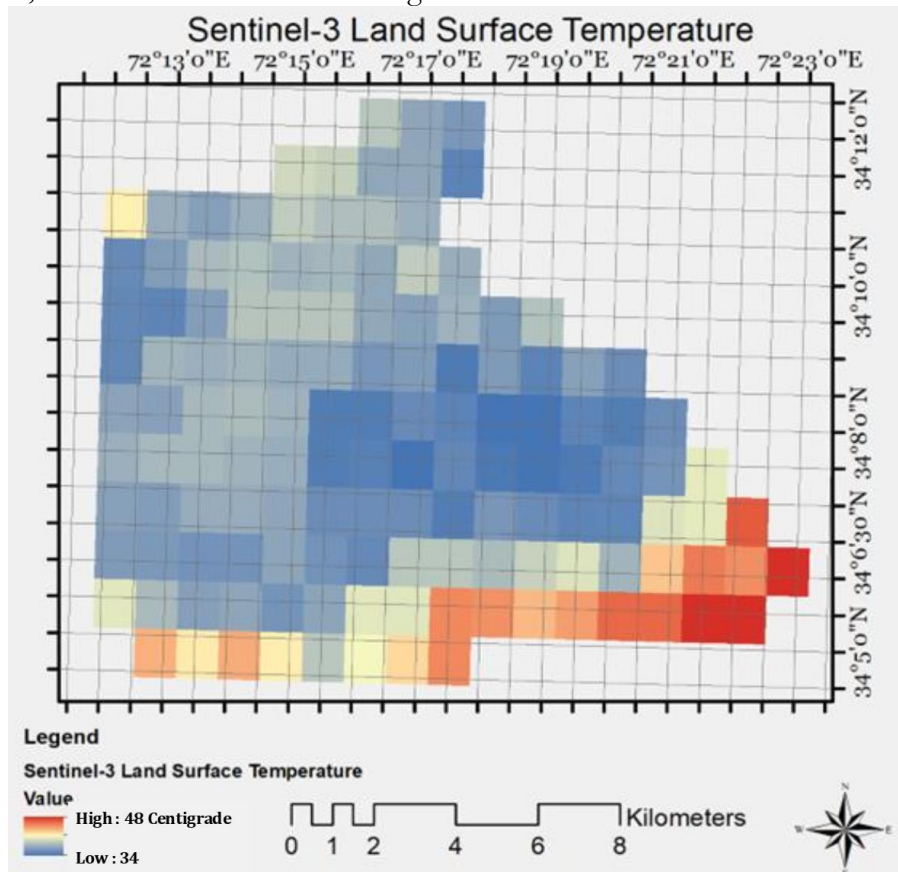


Figure 5: LST

Following this, a refinement of Land-Surface Temperature takes place, involving intricate adjustments that incorporate the reflectance band from Sentinel-2, the Land-Surface Temperature from Sentinel-3, and the templating information from Sentinel-3 which is shown in Figure 6: Sharpen Land Surface Temperature (Sharpen LST) represents the sharpened land surface temperature of the studied area. These fine-tuning steps are instrumental in enhancing the precision and reliability of Land-Surface Temperature data, thereby ensuring the accuracy of subsequent ET analyses. The adjustments made during processing, particularly those related to Sentinel-2 reflectance, Sentinel-3 Land-Surface Temperature, and Sentinel-3 templating, bear paramount importance, forming the cornerstone for generating reliable data that underpins in-depth analysis and interpretation of ET patterns.

ECMWF:

The data, originating directly from Snap, undergoes a sequential process involving the use of the S2 elevation graph and NetCDF file for reanalysis [22]. Figure 7 represents the meteorological data and the parameters that have been used including air humidity data, pressure data, wind data, and solar radiations. The incorporation of ERA5 reanalysis data is pivotal in generating estimates of long-wave irradiation. Computation of Net Shortwave Radiation is a multifaceted task, requiring the integration of reflectance and transmittance estimates, biophysical attributes, vegetation structural characteristics, Reanalysis data, and the "Warp to Template" process. Land Surface Fluxes, a critical parameter in environmental and ecological studies, are accurately estimated by utilizing datasets such as S3-Sharpened LST, S3-LST, S2-Biophysical Properties, S2-Vegetation Structural Parameters, S2-Green Vegetation Fraction, S2-Aerodynamic Roughness, ERA5 Reanalysis data, Net Shortwave radiation, Longwave irradiance, and S2-Mask.

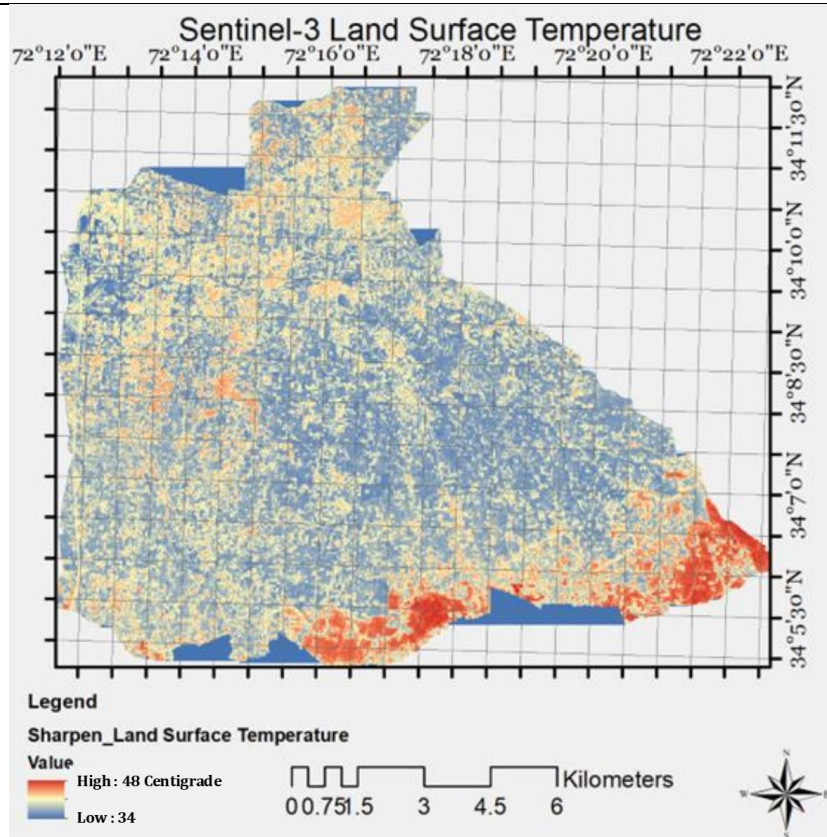


Figure 6: Sharpen Land Surface Temperature (Sharpen LST)

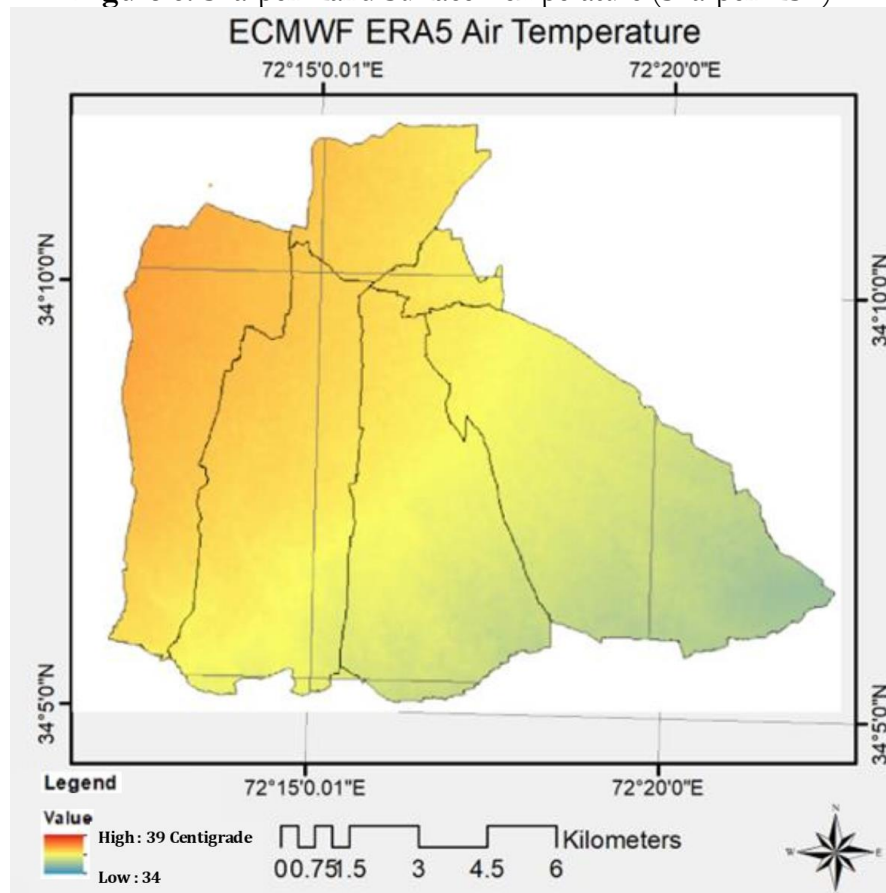


Figure 7: Fluctuation in Air Temperature in the study site

The primary data source was directly obtained from the ECMWF repository, and this data undergoes processing using Sentinel-2 and ECMWF data files for a comprehensive reanalysis. Leveraging reanalysis data is instrumental in calculating an estimate of long-wave irradiation. The calculation of Net Shortwave Radiation involves a meticulous approach, incorporating estimated reflectance and transmittance, biophysical attributes, and vegetation structural characteristics. The integration of Reanalysis data and the implementation of the "Warp to Template" process ensure accuracy in these calculations. The estimation of Land Surface Fluxes relies on various datasets, including Sentinel-3 land surface temperature, Sentinel-2 biophysical properties, Sentinel-2 vegetation structural parameters, Sentinel-2 aerodynamic roughness, Reanalysis data, Net Shortwave radiation, Longwave irradiance, and Sentinel-2 Mask. This comprehensive methodology contributes to accurate estimations of Land Surface Fluxes which are shown in Figure 8: Land Surface Energy Fluxes, providing invaluable insights for sustainable resource management and environmental conservation efforts by unraveling intricate ecosystem interactions. Land surface energy fluxes are fundamental components in estimating evapotranspiration through remote sensing methodologies. Remote sensing technologies capture crucial information about the exchanges of energy between the Earth's surface and the atmosphere, facilitating the quantification of key flux components. Incoming solar radiation is absorbed by the land surface, driving processes like photosynthesis and surface heating. Outgoing terrestrial radiation represents the heat emitted by the Earth, influencing nighttime temperatures. Sensible heat flux, measured through temperature differentials, indicates the energy transferred as heat between the land surface and the atmosphere. Latent heat flux, associated with the phase change of water, encompasses the energy consumed during evaporation from soil and transpiration from plants. Utilizing remote sensing data, particularly from thermal infrared sensors, enables the estimation of land surface temperature, a critical parameter for separating sensible and latent heat fluxes. This information contributes to accurate models, such as the SEBAL, enhancing the assessment of evapotranspiration rates across diverse landscapes and supporting water resource management and environmental monitoring.

Land Surface Energy Flux

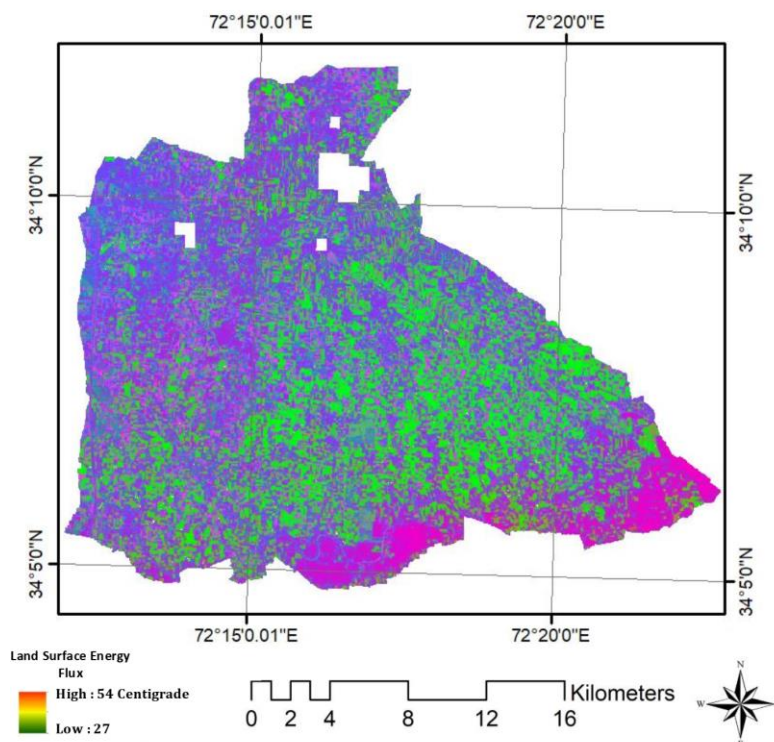


Figure 8: Land Surface Energy Fluxes Result

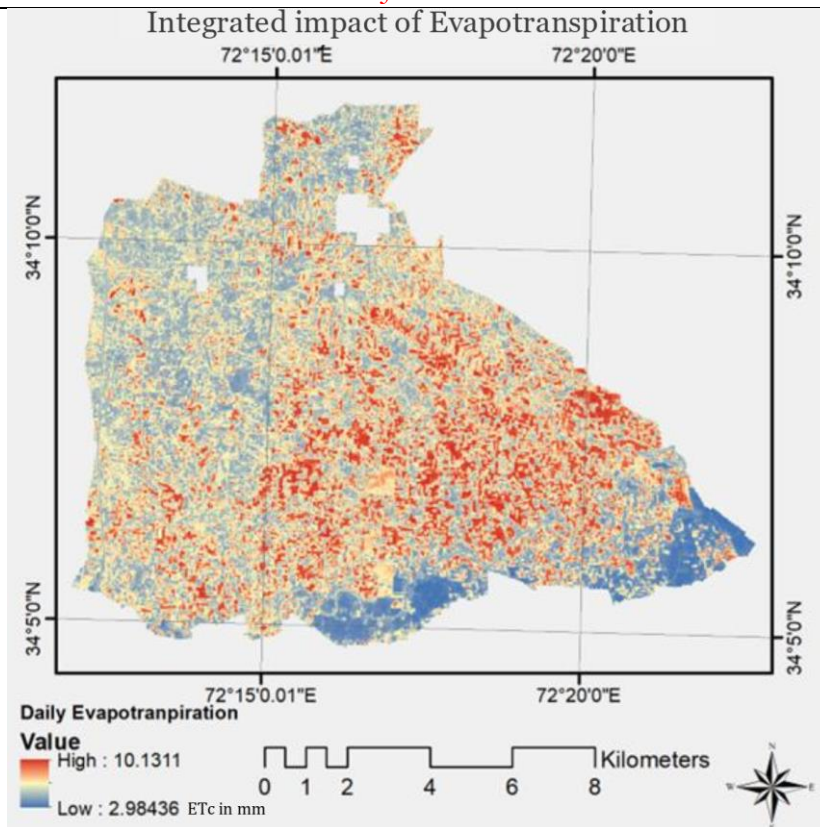


Figure 9: Spatial distribution of Evapotranspiration.

Figure 9: represents the map of the studied area. The red color in the above figure represents the highest evapotranspiration in the observed region. In Table 2, we can observe that the trend shown by the estimated calculated ET values aligns with the average value derived from all the surveyed tobacco fields. Due to the irregular usage of irrigation on these lands, a noticeable contrast emerges. It appears that the farmers are not factoring in the ETc values, as they continue to irrigate their crops in the same manner and at the same time daily. The irrigation process does not consider the growth stages of FCV or their specific water requirements. The variance between the computed ET and the required ET values can be attributed to various factors, including human error, insufficient rainfall, or improper irrigation practices.

Table 2: ETc vs Actual Mean Results

Stages	DOY	ETc mm/day	Actual ET Mean
Initial Season	3/16/2022	1.65	4.298256
	21st March	1.87	5.14646
	31st March		5.15096
Development Season	10th April	2.31	5.096235
	15th April	3.52	4.520898
	25th April	5.49	4.618627
	30th April		5.270093
	5th May	7.69	5.543481
	10th May		6.486178
Mid-Season	13th May	8.89	7.255595
	18th May		7.16988
	28th May		7.600814
	4th June	9.23	7.035744
Late Season	12th June	8.69	7.23139

	24th June	7.27	8.355929
	29th June		8.047527

The pattern shown by the estimated computed ETc values, which closely match the average value produced from all the sampled tobacco fields, is illustrated in Figure 10: Calculated ET Mean vs Actual ET. However, the inconsistent use of irrigation on these farms causes a glaring disparity. The discrepancies that have been found are a result of these inconsistent irrigation practices.

Farmers continue to water their crops consistently and at set times each day, even though the ETc values are not being considered in the irrigation routines. Additionally, it appears that the FCV plant's many growth stages and their unique water needs during the irrigation period are not being considered.

There are many reasons for the apparent discrepancy between the computed ET and the necessary ET values, including possible human error, insufficient rainfall, or maybe ineffective irrigation techniques. This difference highlights the urgent need to put more precise and customized irrigation management systems into place. Such plans should be created to consider the distinct growth phases of the FCV plant, maximizing water efficiency and encouraging sustainable agriculture methods. We may strive toward a more effective and long-lasting strategy for irrigation within the tobacco farming environment by addressing these aspects.

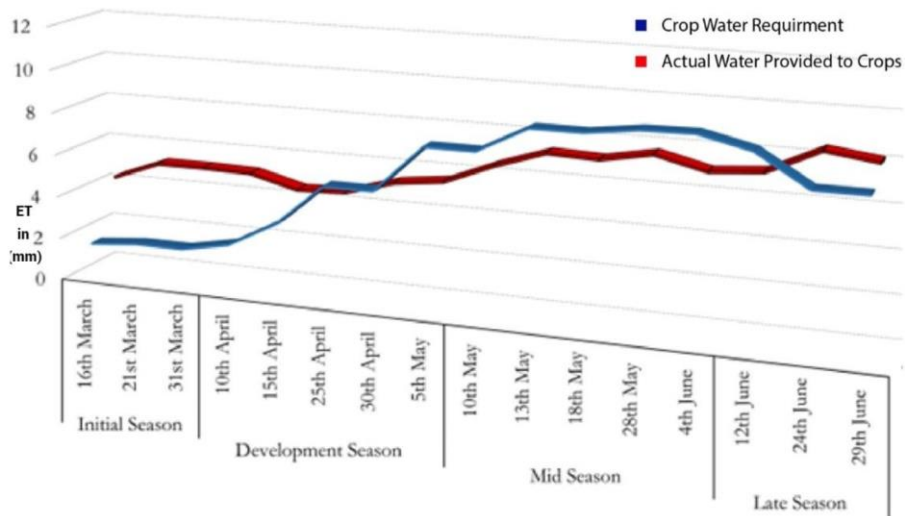


Figure 10: Calculated ET Mean vs Actual ET

- The water requirements for FCV tobacco vary with the seasons, as indicated by the primary ETc graph. However, it is evident from these graphs that this fundamental principle has not been considered.
- Variances in Real ET values among fields that are in close physical proximity are typically the result of either a water deficit or surplus.
- Tobacco fields situated near waterways exhibit higher Real ET values, whereas those farther from the canals show lower values.
- In contrast, low-lying areas receive a uniform level of irrigation.
- The seasonal rise in ETc levels generally follows a consistent pattern.
- The average graph reveals opportunities for enhancing water conservation and increasing yields.
- Local farmers can potentially save a significant amount of water at the start of the season by aligning with the trend of ETc values. Subsequently, rainfall can fulfill most of the water requirements in April and May, preserving a substantial volume of water for other purposes.

The provided data illustrates the progression of a crop through various growth stages, each associated with a specific day of the year. In the initial season, starting from the 16th of March, the crop's water requirement gradually increased, reaching 1.87 by the end of March, while the ETa showed an even steeper rise, peaking at 5.15096. The development season, commencing on the 10th of April, exhibited a more pronounced increase in crop water requirement, reaching 7.69 by the 5th of May, while the actual ET fluctuated, indicating some variability in water utilization. The mid-season, from the 10th of May, demonstrated consistent water requirements, peaking at 9.23, with actual ET values showing fluctuations in the crop's water utilization. As we entered the late season, starting from the 12th of June, the crop's water requirement decreased to 7.27, while actual ET indicated a slight increase.

From an agricultural perspective, it is crucial to note that the actual ET values play a significant role in assessing the effectiveness of irrigation practices. Discrepancies between crop water requirements and actual ET values can provide insights into water management. For instance, during the development season, the actual ET often lagged behind the crop's water requirement, suggesting potential opportunities for more efficient water use. Additionally, the fluctuations in actual ET during the mid-season raise questions about the consistency of irrigation practices.

Discussion:

In this dissertation, we utilized a combination of Sentinel-2, Sentinel-3, and ECMWF data to predict water evaporation in Tobacco crops within the Yar Hussain, Swabi region. Our study incorporated data from FAO CropWat and the Mardan meteorological station to compare crop water demand ETc with available crop water supply ETa across four growth stages. The identification of Tobacco fields involved on-the-ground data collection and landcover classification through machine learning and deep learning techniques. We further analysed ETa data from five distinct union councils using ESA SENET. The results indicated an excessive water supply to the crops during their growth phases, with inconsistencies noted when comparing observed ETa and ETc values to irrigation scheduling during development and midseason periods.

Our research underscores the reliability and value of the SENET-based ETa estimation method for a wide region. However, we acknowledge the need for additional research and effort to comprehensively develop this field. Future research avenues include optimizing water management practices through real-time meteorological data integration and advanced algorithm development, preventing over-irrigation while accurately estimating crop water requirements. Extensive field validation tests are proposed for validation and calibration purposes to enhance model precision and adaptability. Incorporating additional relevant data sources, such as soil moisture measurements, crop growth stage information, and soil parameters, is identified as a potential strategy to improve model accuracy and provide a comprehensive understanding of water balance dynamics.

Furthermore, customization of ETa models tailored to individual crops is suggested, allowing for more precise estimates and water management strategies aligned with specific farming practices. The discussion also extends to the implementation of the proposed ETa estimation methodology on a larger scale. Coordination with water management authorities, policymakers, and agricultural stakeholders may be necessary for integrating the model into existing agricultural monitoring systems and decision-support tools. By addressing these questions, our research aims to enhance water resource management and agricultural productivity in numerous regions, offering accurate and widely applicable ETa estimation models based on remote sensing.

Conclusion:

In this study, we utilized data from Sentinel-2, Sentinel-3, and ECMWF weather sources to estimate actual ETa for tobacco crops in the Yaruhussain region of Swabi. Comparative

analysis was performed between the ETa trends and FAO CropWat estimates for tobacco crop water requirements ETc across four distinct growth stages. Through ground truth surveys, six random tobacco fields were identified per union council in Yarrhussain. The findings highlighted a pattern of excessive irrigation during the initial and development phases, coupled with irregular scheduling in the development and mid-season stages. These observations underscore the potential applicability of our methodology in broader geographical regions. This study underscores the significance of refining irrigation practices for effective water management in agriculture.

Author's Contribution: Conceptualization: Waleed Khan Data Creation, Muhammad Hamza, Formal Analysis, Muhammad Hamza, Waleed Khan, Nasru Minallah, Investigation, Nasru Minallah, Muhammad Hamza, Waleed Khan, Supervision, Nasru Minallah, Validation, Waleed Khan Software, Muhammad Hamza, Writing-Original Draft, Shujat Hussain and Waleed Khan, Writing review and Editing, Nasru Minallah

Conflict of Interest: The authors declare no conflict of interest in publishing this manuscript in IJIST.

Project Details: The project was sponsored by the National Center for Big Data and Cloud Computing, at the University of Engineering and Technology Peshawar

References:

- [1] N. Bhattarai, S. B. Shaw, L. J. Quackenbush, J. Im, and R. Niraula, "Evaluating five remote sensing based single-source surface energy balance models for estimating daily evapotranspiration in a humid subtropical climate," *Int. J. Appl. Earth Obs. Geoinf.*, vol. 49, pp. 75–86, Jul. 2016, doi: 10.1016/J.JAG.2016.01.010.
- [2] W. Ishaque, R. Tanvir, and M. Mukhtar, "Climate Change and Water Crises in Pakistan: Implications on Water Quality and Health Risks," *J. Environ. Public Health*, vol. 2022, 2022, doi: 10.1155/2022/5484561.
- [3] T. Khan, H. Nouri, M. J. Booij, A. Y. Hoekstra, H. Khan, and I. Ullah, "Water Footprint, Blue Water Scarcity, and Economic Water Productivity of Irrigated Crops in Peshawar Basin, Pakistan," *Water* 2021, Vol. 13, Page 1249, vol. 13, no. 9, p. 1249, Apr. 2021, doi: 10.3390/W13091249.
- [4] C. J. Tucker and P. J. Sellers, "Satellite remote sensing of primary production," *Int. J. Remote Sens.*, vol. 7, no. 11, pp. 1395–1416, 1986, doi: 10.1080/01431168608948944.
- [5] M. Aslam, "Agricultural Productivity Current Scenario, Constraints and Future Prospects in Pakistan," *Sarhad J. Agric.*, vol. 32, no. 4, pp. 289–303, Oct. 2016, doi: 10.17582/JOURNAL.SJA/2016.32.4.289.303.
- [6] W. Khan et al., "On the Performance of Temporal Stacking and Vegetation Indices for Detection and Estimation of Tobacco Crop," *IEEE Access*, vol. 8, pp. 103020–103033, 2020, doi: 10.1109/ACCESS.2020.2998079.
- [7] N. Minallah, M. Tariq, N. Aziz, W. Khan, A. ur Rehman, and S. B. Belhaouari, "On the performance of fusion based planet-scope and Sentinel-2 data for crop classification using inception inspired deep convolutional neural network," *PLoS One*, vol. 15, no. 9, p. e0239746, Sep. 2020, doi: 10.1371/JOURNAL.PONE.0239746.
- [8] N. Minallah and W. Khan, "Comparison of Neural Networks and Support Vector Machines for the Mass Balance Ablation Observation of Glaciers in Baltoro Region," *J. Inf. Commun. Technol. Robot. Appl.*, vol. 9, no. 2, pp. 37–45, Apr. 2019, Accessed: Feb. 07, 2024. [Online]. Available: <https://jictra.com.pk/index.php/jictra/article/view/106>
- [9] T. Hák, S. Janoušková, and B. Moldan, "Sustainable Development Goals: A need for relevant indicators," *Ecol. Indic.*, vol. 60, pp. 565–573, Jan. 2016, doi: 10.1016/J.ECOLIND.2015.08.003.
- [10] N. Ali, A. Jaffar, M. Anwer, D. M. Raza, and N. Ali, "The Economic Analysis of

- Tobacco Industry: A Case Study of Tobacco Production in Pakistan.” Jan. 05, 2015. Accessed: Feb. 07, 2024. [Online]. Available: <https://papers.ssrn.com/abstract=2600400>
- [11] Sajjad, Z. U. Haq, J. Iqbal, and M. F. Shahzad, “Understanding the Profitability, Supply, and Input Demand of Tobacco Farms in Khyber Pakhtunkhwa, Pakistan,” *Econ.* 2022, Vol. 10, Page 59, vol. 10, no. 3, p. 59, Mar. 2022, doi: 10.3390/ECONOMIES10030059.
 - [12] R. H. Qureshi and M. Ashraf, Water security issues of agriculture in Pakistan. 2019. [Online]. Available: <https://www.paspk.org/wp-content/uploads/2019/06/PAS-Water-Security-Issues.pdf>
 - [13] D. T. Lauer, S. A. Morain, and V. V. Salomonson, “The Landsat program: Its origins, evolution, and impacts,” *Photogramm. Eng. Remote Sensing*, vol. 63, no. 7, pp. 831–838, 1997.
 - [14] M. A. Wulder et al., “Current status of Landsat program, science, and applications,” *Remote Sens. Environ.*, vol. 225, pp. 127–147, May 2019, doi: 10.1016/J.RSE.2019.02.015.
 - [15] M. Berger, J. Moreno, J. A. Johannessen, P. F. Levelt, and R. F. Hanssen, “ESA’s sentinel missions in support of Earth system science,” *Remote Sens. Environ.*, vol. 120, pp. 84–90, May 2012, doi: 10.1016/J.RSE.2011.07.023.
 - [16] R. C. Bispo, F. B. T. Hernandez, I. Z. Gonçalves, C. M. U. Neale, and A. H. C. Teixeira, “Remote sensing based evapotranspiration modeling for sugarcane in Brazil using a hybrid approach,” *Agric. Water Manag.*, vol. 271, p. 107763, Sep. 2022, doi: 10.1016/J.AGWAT.2022.107763.
 - [17] V. Burchard-Levine et al., “A remote sensing-based three-source energy balance model to improve global estimations of evapotranspiration in semi-arid tree-grass ecosystems,” *Glob. Chang. Biol.*, vol. 28, no. 4, pp. 1493–1515, Feb. 2022, doi: 10.1111/GCB.16002.
 - [18] A. Garcia-Pedrero, M. Lillo-Saavedra, D. Rodriguez-Esparragon, and C. Gonzalo-Martin, “Deep Learning for Automatic Outlining Agricultural Parcels: Exploiting the Land Parcel Identification System,” *IEEE Access*, vol. 7, pp. 158223–158236, 2019, doi: 10.1109/ACCESS.2019.2950371.
 - [19] U. Kumar et al., “Evaluation of Spatio-Temporal Evapotranspiration Using Satellite-Based Approach and Lysimeter in the Agriculture Dominated Catchment,” *J. Indian Soc. Remote Sens.*, vol. 49, no. 8, pp. 1939–1950, Aug. 2022, doi: 10.1007/S12524-021-01367-W.
 - [20] S. Chintala, T. S. Harmya, B. V. N. P. Kambhammettu, S. Moharana, and S. Duvvuri, “Modelling high-resolution Evapotranspiration in fragmented croplands from the constellation of Sentinels,” *Remote Sens. Appl. Soc. Environ.*, vol. 26, p. 100704, Apr. 2022, doi: 10.1016/J.RSASE.2022.100704.
 - [21] S. Czapiewski and D. Szumińska, “An overview of remote sensing data applications in peatland research based on works from the period 2010–2021,” *Land*, vol. 11, no. 1, p. 24, Jan. 2022, doi: 10.3390/LAND11010024/S1.
 - [22] Y. Cui, L. Song, and W. Fan, “Generation of spatio-temporally continuous evapotranspiration and its components by coupling a two-source energy balance model and a deep neural network over the Heihe River Basin,” *J. Hydrol.*, vol. 597, p. 126176, Jun. 2021, doi: 10.1016/J.JHYDROL.2021.126176.



Copyright © by authors and 50Sea. This work is licensed under Creative Commons Attribution 4.0 International License.